



## **GPRS Data Logger** for data remote monitoring and SMS remote alarming and control applications **BR928-DL**

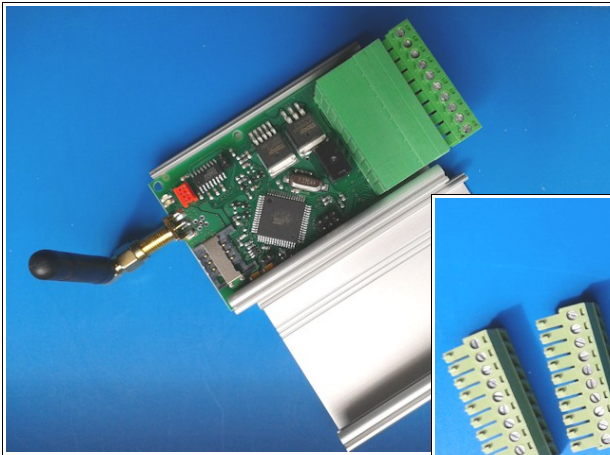

Low dimensions (50.5x79.5mm) and low cost GPRS Data Logger.

Wireless remote monitoring, control and alarming over dual (900,1800Mhz) or quad-band (850,900,1800,1900Mhz) GSM network.

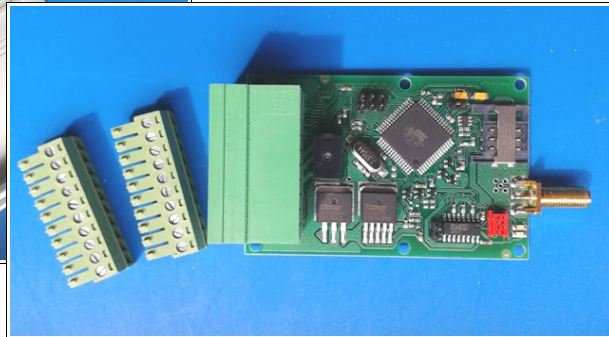

You can use a mobile phone to monitor the status of equipment or system, receive data and notification of events, send control commands to remote equipment.

### **Features:**

- Dial or Quad band GSM module
- 6/5 digital inputs
- 0/1 pulse/counter inputs (2 - optional)
- 3 analogue inputs (0-10V / 0-5V / 0-20/4-40mA)
- 2 temperature sensor inputs
- 2 open drain outputs
- 1 relay outputs
- Power supply monitoring
- Event notification via SMS
- Remote control via SMS (turn equipment on and off at any location via GSM)
- GPRS Data Logger (csv-file to FTP-server)
- Simple for installation via PC serial port or via SMS
- User definable input alarming text descriptions
- Pluggable screw terminal blocks for external signal and power supply connections
- External stabilized +12VDC power supply
- Board dimensions: 50.5x77.5mm
- Enclosure: FISCHER ELEKTRONIK AKG 55 32 80 ME (optional)

### **Applications:**

Pumping  
Transformer Station  
Base Stations  
Power Generator  
Refrigerator  
Waster-water Treatment Station  
Unmanned Equipment and System